



INNOVATIVE SAFE FOR  
COMBINED BURGLARY  
AND FIRE PROTECTION  
WHICH MEETS POLICE  
APPROVED STANDARDS



# DUOGUARD

BURGLARY & FIRE-RESISTANT PROTECTION




## KEY FEATURES

- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grades 0 and I.
- Approved by ECB•S in accordance with EN 1047-1 in class S 60 P for one hour's fire protection of paper documents.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- The three-way boltwork is constructed with solid steel bolts.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.
- Attractive dark grey appearance (RAL 7016)

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width (mm)*	External depth (mm)**	Internal height (mm)	Internal width*** (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)	Standard Fittings
40	435	500	456	335	400	295	40	100	1 shelf
60	530	500	521	430	400	360	62	123	1 shelf
110	690	600	561	590	500	386	114	175	2 shelves
150	875	600	561	775	500	386	150	212	2 shelves
200	1150	600	561	1050	500	386	203	264	2 shelves
300	1600	600	561	1500	500	386	290	337	3 shelves
350	1600	675	585	1500	575	410	354	374	3 shelves
450	1850	675	615	1750	575	440	443	436	4 shelves

Projection of hinge\* (20mm) and projection of handle\*\* (65mm) not included. \*\*\* Width excluding shelf racking strips. Racking reduces the internal width by 15mm

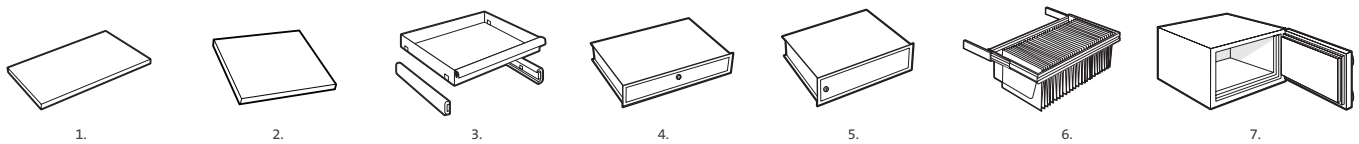

### INTERNAL FITTINGS

1. Shelf \* 2. Reinforced shelf\*\* 3. Extendable shelf 4. Full width drawer 5. Lockable cupboard 6. Pull out file frame 7. Data media insert

\* Max shelf capacity 60kg. \*\* Max shelf capacity 120kg

### LOCK OPTIONS

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

Dual locking is available from model 110. The primary lock can be complemented by a manual combination lock, key lock or electronic lock.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

DuoGuard's high-security electronic lock – certified Class B by ECB•S – includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened. Also equipped with time-delay override.
- Protective function to raise silent alarm if lock is being opened under duress.



Approved by the Association of Insurance Surveyors

### FIRE TESTING

DuoGuard has been approved in accordance with the European standard, EN 1047-1 in fire class S 60 P, which means the safe will protect paper documents for one hour. This certification was awarded by ECB•S (European Certification Board•Security Systems).

#### STAGE 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire.

#### STAGE 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

### BURGLARY TESTING



DuoGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection in Grades 0 and I.

A range of attack tools were used to test DuoGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.



The DuoGuard range is accredited by Secured by Design and meets police approved standards

[www.chubbsafes.com](http://www.chubbsafes.com)