


Packing Details



Key Cabinet X 1

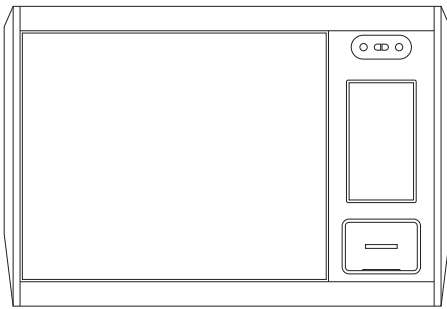


Power Cable X 1



KeyTag X 31




KeySeal X 31



Mechanical Key X 4



Expansion Bolt X 5




Operation Manual X 1




KeyLabel X 31

Technical Parameters

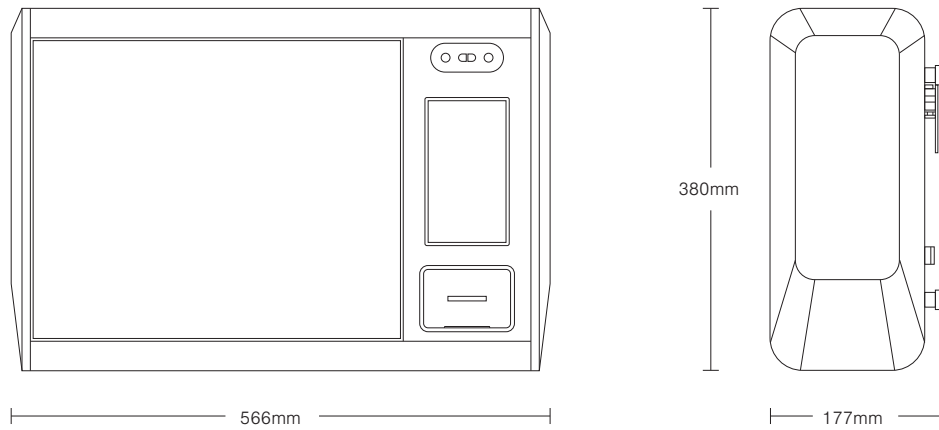

Key positions	26	Power Supply	220V > 12V / 5Ah
Dimensions (L*W*H)	566mm x 177mm x 380mm	Power Consumption	60W Max
Weight	17kg	Operating System	Android 4.4
Material	1.5mm thick steel + ABS	Display	7" Touchscreen
Door	Solid Steel (Standard)	Certifications	CE


Product Overview

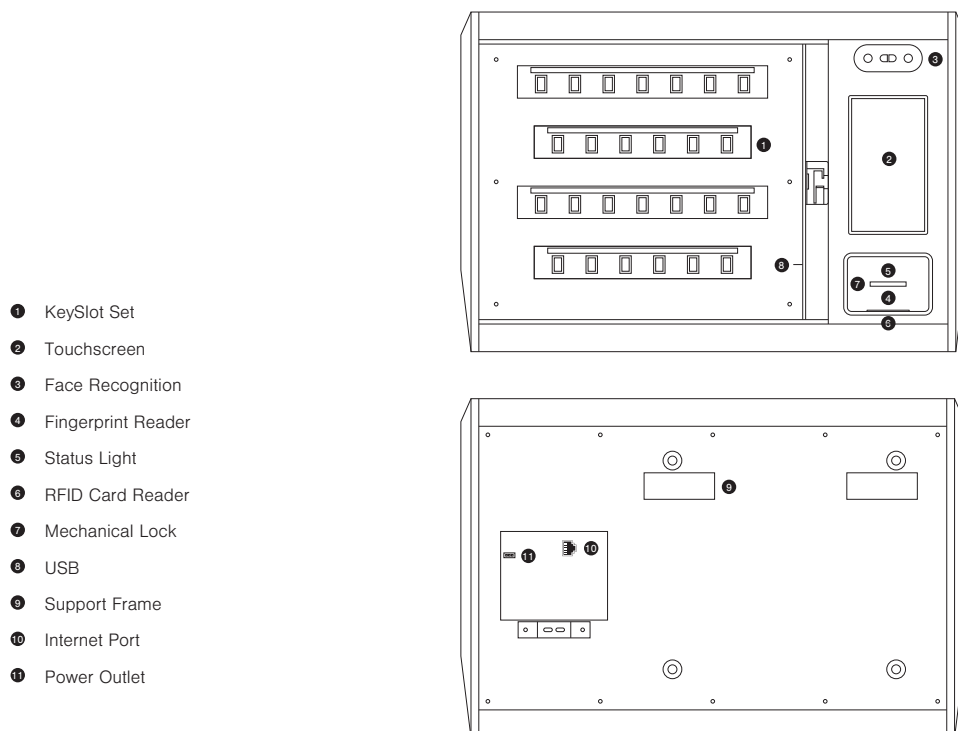

- 1 Click the Touchscreen.
- 2 Input the Administrator ID "00000".
- 3 Input the Administrator Password "00000".
- 4 Click "Login".



ID and Password

The administrator ID "00000" cannot be changed, the Password can be changed.

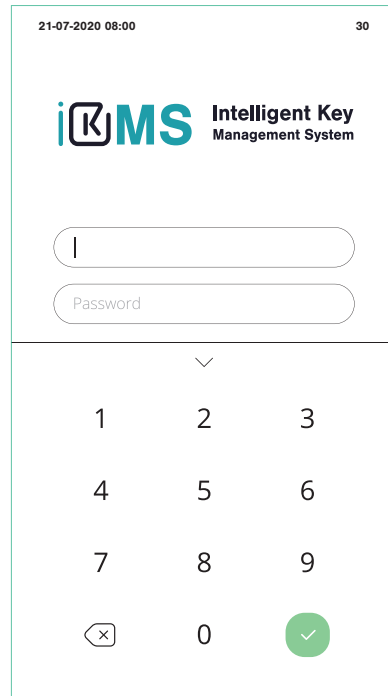




Main Interface

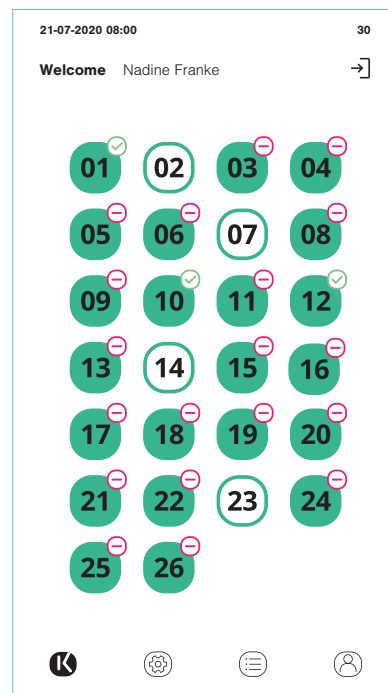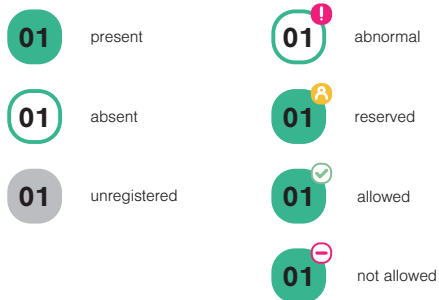The main interface shows the status of all keys.




Main interface → Settings → Key settings



- 1 Select one key, press and hold for 1 second.
- 2 Click “” to select all keys, then click “” to register.
- 3 Insert all KeyTags.
- 4 Close the door.
- 5 All key icons change green, registration done.

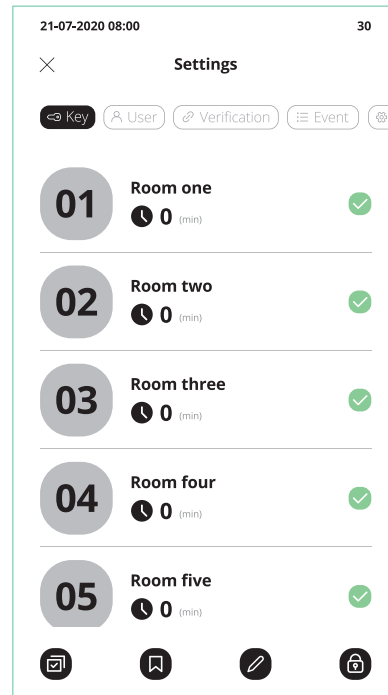

Key Settings

Main interface → Settings → Key settings

- 1 Select one key, then press “”.
- 2 Input “Key Name” and “Permission Validity”, press “OK”.

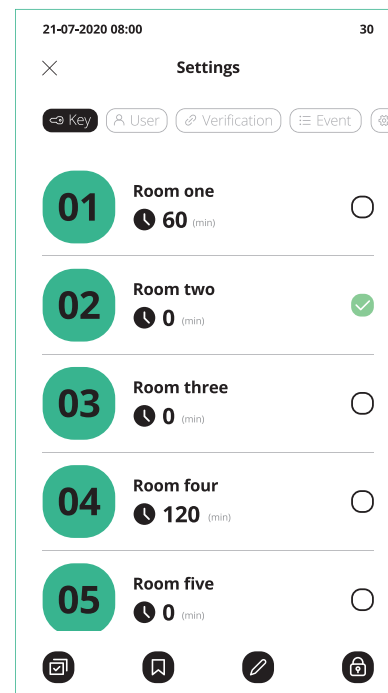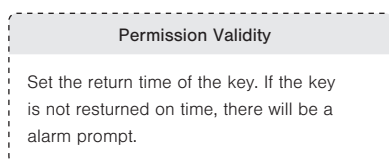

Main interface → Settings → User settings

- 1 Click " + " .
- 2 Input "User name", "User ID", "Telefon", and "Email".
- 3 Set the login type "Fingerprint", "Face ID", "Card", and "Password".
- 4 Select the user type.
- 5 Select the valid time.

21-07-2020 08:00 30

✕ Edit User ✓

User name

Nadine Franke

User ID

55357714

Telefon

18322541875

Email

nadine.franke@gmail.com

Fingerprint >


Face ID >

Card >


Password

User Settings

Change user information

- 1 Select one user, press and hold for 1 second.
- 2 Press "  " in the bottom navigation bar.
- 2 Change user information.

Delete User

- 1 In the User settings interface, select one user.
- 2 Press "  " .

21-07-2020 08:00 30

✕ Settings

Key User Verification Event

User 49 Group 5

Administrator

Nadine Franke ID 55357714 ○

Frederic Fels ID 26852411 ○





Niclas Eckert ID 88537441 ○

D

David Costa ID 55357714 ✓

F

Frederic Fels ID 26852411 ○

Add Group

- 1 Click "Group", then click " + " .
- 2 Input "Group name" .
- 3 Select "Operation permission".
- 4 Select "Valid time".
- 5 Select "Key permission".

User Permission

Administrator have all Permission and common user do not have Permission by default. Customize user permissions by grouping.

21-07-2020 08:00 30

✕ **Edit Group** ✓

Group name


Trade 5/50

Operation permission >

Valid time >

Key permission >

Valid Time Settings

- 1 Select one user, then press "  ".
- 2 Select the type "User".
- 3 Select valid time "Custom".
- 4 Select "Week" or "Date", then press " + " .
- 5 Add time and date.

Valid time

All day

Custom

Week Date

Monday 08:00-12:00 ✕

+

21-07-2020 08:00 30

✕ **Add valid time** ✓

21	59	21	57
22	00	22	58
23	: 01	—	23 : 59
00	02	00	00
01	03	01	01

08:00-12:00 ✕

14:00-18:00 ✕

Add time

Sunday

Monday


Tuesday

Wednesday

Thursday


Add Fingerprint, Face ID, and Card

Add Fingerprint

- 1 Select one user, then press “”.
- 2 Click “Fingerprint”.
- 3 Register fingerprints.




Add Face

- 1 Select one user, then press “”.
- 2 Click “Face ID”.
- 3 Stand before the camera.




Add User Card

- 1 Select one user, then press “”.
- 2 Click “Card”.
- 3 Present user card on the card reader.



Key Permission

Main interface → Settings → User settings

- 1 Select one user, then press “”.
- 2 Select keys.


21-07-2020 08:00		30
×	Key permission	✓
01	Room one	✓
02	Room two	✓
03	Room three	○
04	Room four	○
05	Room five	✓
06	Room six	✓
07	Room seven	○
08	Room eight	○

Verification Settings

Add Multi-verification

Main interface → Settings → Multi-verification settings

- 1 Press “ + ”.
- 2 Select "Key", "User" and "Verifier".

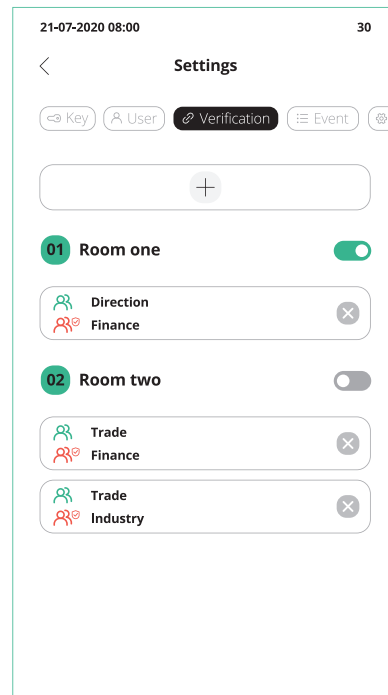


Event Settings

Add Event

Main interface → Settings → Event settings


- 1 Press “ + ”.
- 2 Input "Event", then press "OK".
- 3 Click “ ⚙ ”.
- 3 Select keys that needs to activate the event.

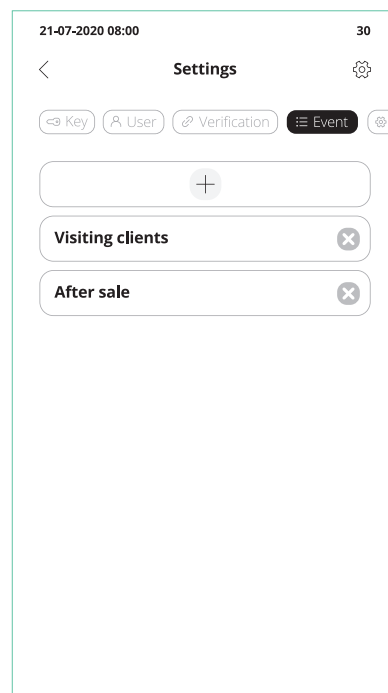


By Password

- 1 Input "user ID" and "user password".
- 2 Click "Login", select a key, take the key.

By Face ID


- 1 press " ".
- 2 Stand before the camera.
- 3 Select a key, take the key.

By Fingerprint

- 1 Input "user ID", then press " ".
- 2 Present user finger on the fingerprint reader.
- 3 Select a key, take the key.

By Card

- 1 Place the user card on the card reader.
- 2 Select a key, take the key.

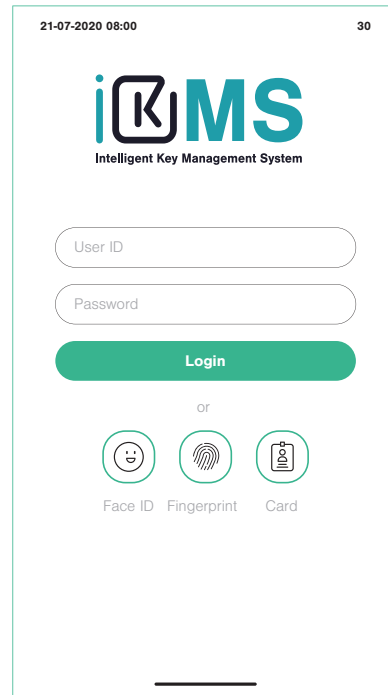


Return Keys

- 1 Present the KeyTag on the card reader.
- 2 Insert the KeyTag to KeySlot with blue light.
- 3 Close the door.

 present

 absent

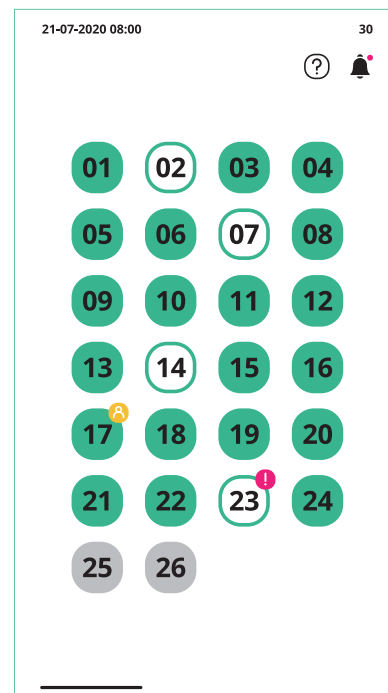

Open the door Illegally

When open the door by incorrect ways, the system will alarm and all KeySlots will flash red.

Door open overdue


If the door is not closed within the set time (Can be changed in Cabinet Settings), the system will alarm.

Foreign object in the KeySlot

If there is foreign object in the KeySlot, the system will alarm and ask to take it out.

Key Returned to incorrect KeySlot

If the key is returned to incorrect KeySlot, the door can not be closed. And the system will alarm and this KeySlot will flash red.

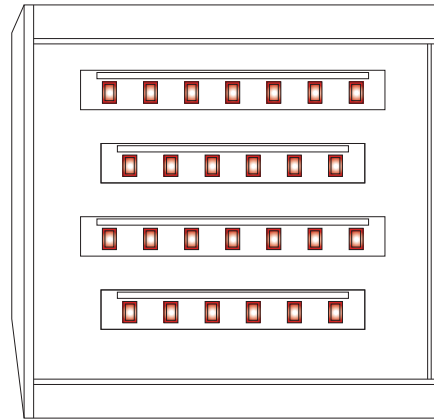

Emergency To Take Keys

By Password


- 1 Login the system by administrator, input "00000".
- 2 Input password "999".
- 3 Click "Login", then take keys.

Emergency Password

The emergency password can be changed in the parameter settings.

By Mechanical Key

Use the mechanical key to take keys.

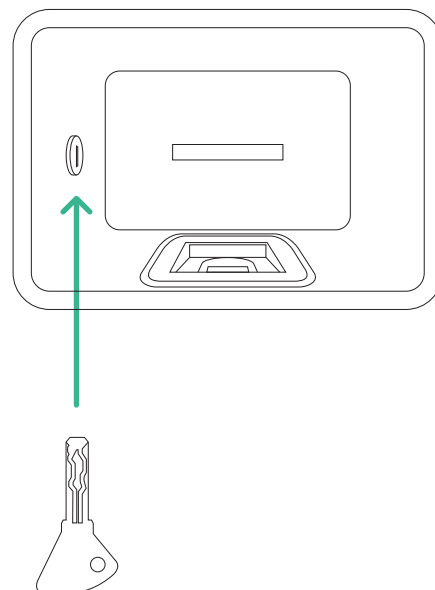


View and Export Report

Main interface → Report

Click "General", "Abnormal" and "Log" to view report.

Export Report

- 1 Click "📄", select "pages".
- 2 Click "Export to external storage device" or click "Send email".
- 3 Click "Open door".
- 4 Insert USB external storage device.

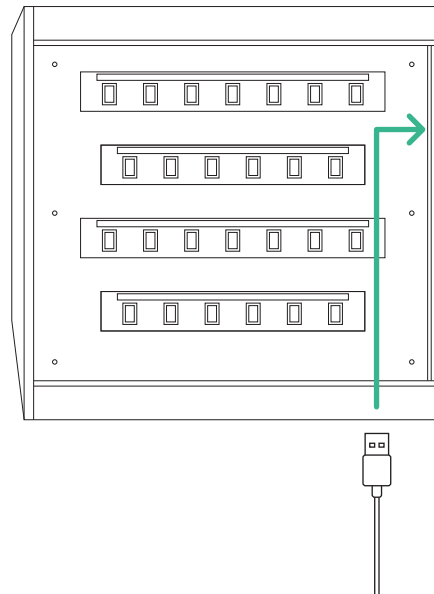


Remote Control

One platform controls multiple key cabinets

Use the network cable or enable the wifi.

Connect to cloud software

- 1 Open the web links: <https://longest.landwell.vip/>
- 2 Input "ID" and "password".

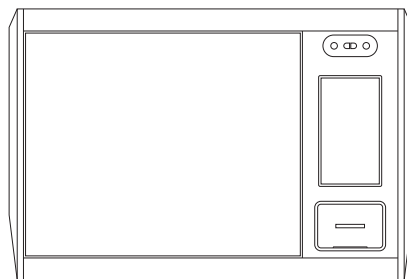


Special Announcement

Please refer to the actual product, the instructions are for reference only.

The manual and program will be updated in real time according to the product, and there will be no further notice if there is an upgrade.

If you do not follow the instructions in the manual, the user shall bear any losses caused thereby.

The final interpretation of this manual belongs to Beijing Landwell Electron Technology Co., Ltd.

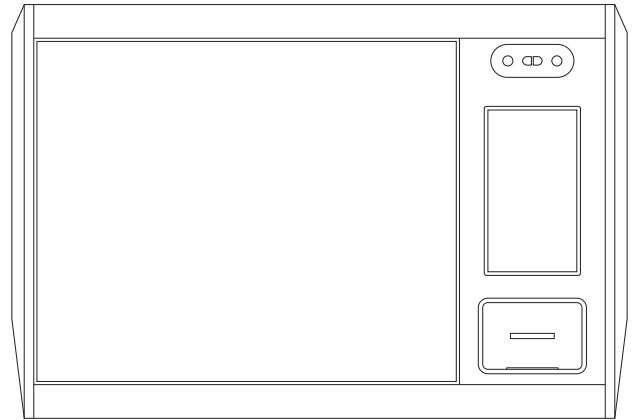

First edition April 2020
© Copyright Landwell 2020



burtonsafes.co.uk
+44 (0) 1484 663388

Burton Security Limited
Brockholes Business Park
Rock Mill Road, Huddersfield
HD9 7BN